



CEILING PANELS

Direct Mount System

Z-Clips for Vaulted or Flat Ceilings


Remember that a minimum gap of 1" is required to engage the Z-Clips on the panels onto the Z-bar on the ceilings.

Determining the number of Z-Clips to use.

The distance, either horizontal or vertical, between Z-clips should not exceed 24". Never use less than 6 clips on a panel.

Z-bars must be purchased in 12' sections. Each 12' section will be cut into either (2) 6' pieces or (1) 4' and (1) 8' piece to accommodate shipping requirements.

Disclaimer: In addition an adhesive must be used to secure the panels to the ceilings.

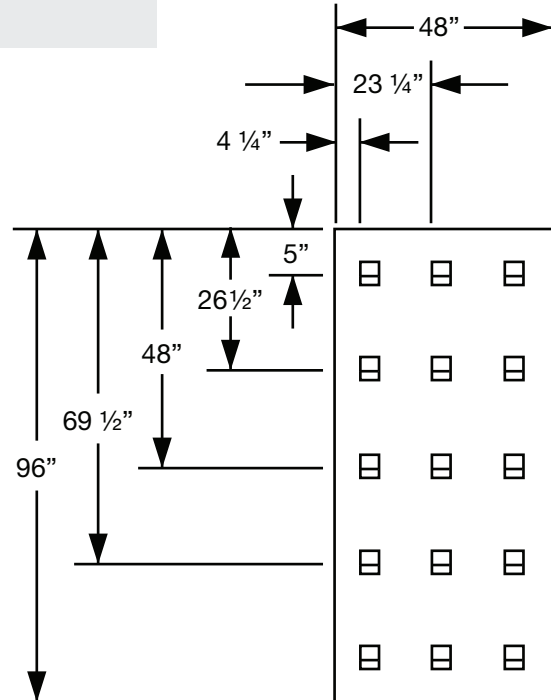


Shoulder Grommets

Determining the number of grommets to use:

The distance, wither horizontal or vertical, between shoulder grommets should not exceed 24".

Disclaimer: In addition an adhesive must be used to secure the panels to the ceilings.

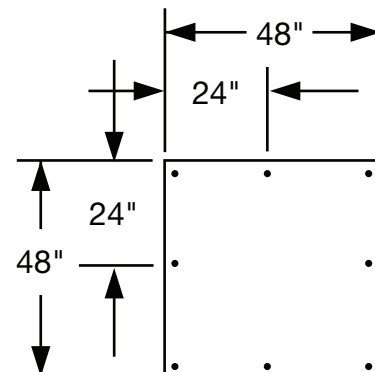



EC BRACKET MOUNTING DETAILS

