
PYRAMID PANELS

Sound Absorbing and Noise Blocking

EXCELLENT ACOUSTIC CONTROL BOLD, GEOMETRIC PATTERN PANEL SIZE OF 24" X 24", 2" OR 4" THICKNESS

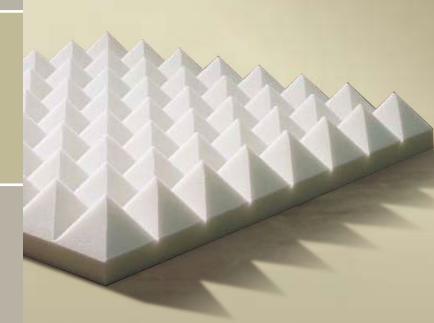

PHYSICAL DATA

Material	Open-cell melamine-based foam				
Density	0.5 to 0.7 lbs./cu. ft. (ASTM D3574-77)				
Long-Term Service Temperature	302°F				
Fire Resistance	Class 1 per ASTM E 84 (all finishes) Meets UL 1715 (natural)				
Flame Spread per ASTM E 84	Natural: 5 Painted: 10				
Smoke Density per ASTM E 84	Natural: 50 Painted: 10				
Microbial Growth	Passes UL 181, section 11				
Fungus Resistance Rating	0 per ASTM G21				
Finishes	Natural (white and light grey), painted				



Helps reduce noise, unwanted sounds and reverberation in many types of interior environments

SOUND ABSORPTION

SOUND ABSURPTION		Coefficients per ASTM C423-90a							
Finish	Thickness	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	NRC	Mounting
Natural (white and grey)	2"	0.07	0.25	0.60	0.94	0.97	1.08	0.70	В
	3"	0.09	0.37	0.81	1.01	1.03	1.07	0.80	В
	4"	0.18	0.44	0.96	1.14	1.18	1.19	0.95	В





98 12TH STREET SAN FRANCISCO, CA 94103 888 / 927 / 7496 PH 415 / 864 / 4447 FX WWW.WESTCOASTSOUNDSOLUTIONS.COM

Solve your noise problem. Call now to get it right the first time (888) 927-7496

Do you need expert design, product selection and installation instruction? West Coast Sound Solutions has the experience you need for a partnership that will work. Call Now (888) 927-7496