


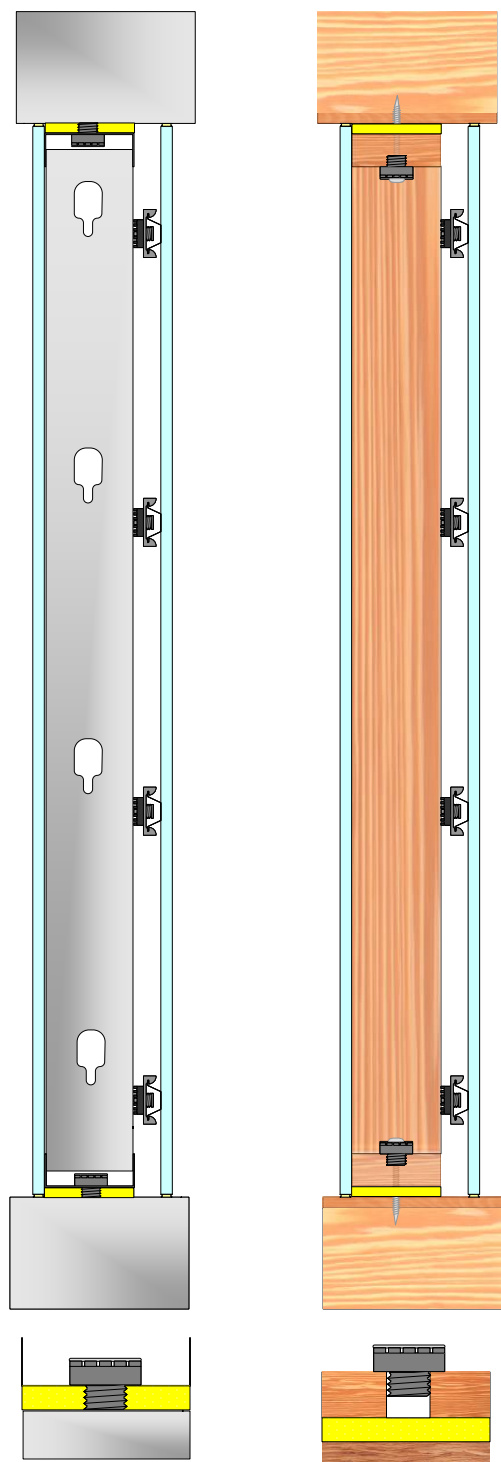

The RSIC-WFI is a system for use with any wood, steel or concrete application where noise control is required. This includes, wood framed, and steel framed wall systems that need Vibration and Noise Isolation from the structure below. The RSIC-WFI Clip and FGP decouples the framed structure from the ceiling-wall and floor-wall intersection. The RSIC-WFI system includes a rubber isolator and RSIC-FGP to decouple the fastener from the framing. The RSIC-FGP is a fiberglass pad to support the wall framing in-between the isolators and is required when used at the base of wall framing during installation.

Wood
Steel
Metal deck

Concrete
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

RSIC-WFI specifications:	
Acoustical design load shear:	144 Lbs/Lf
Acoustical design load tension:	72 Lbs/Lf
Total deflection	1.5 mm
Adjustable	No
Cavity min	1/2"
Cavity Max	1/2"
Adjustment limit	N/A
Use on Ceilings	No
Use on walls	Yes
New Construction	Yes
Retro Fit	Yes