

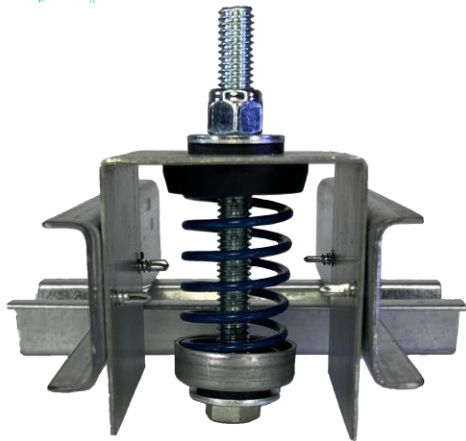
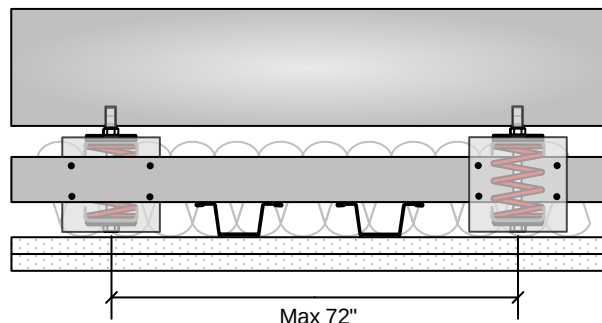


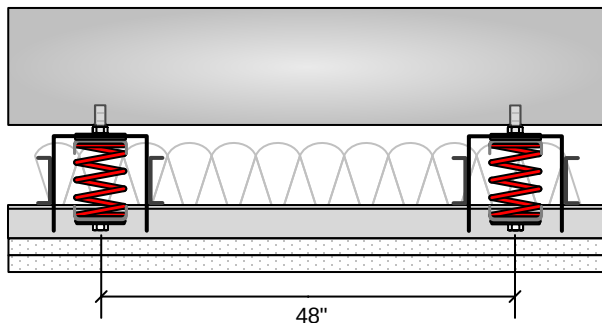

RSIC-SI-CRC2 LP

The RSIC-SI-CRC2 LP is designed to isolate the ceiling at greater spans with two 1.5" x 16 Ga cold-rolled channel and furring channel (25 or 20 Ga). The RSIC-SI-CRC2 LP clip is available in 10 lb, 20 lb, 30 lb, 40 lb, 60 lb, 80 lb, 100 lb, 120 lb versions. Maximum spacing for the RSIC-SI-CRC2 LP is 48" x 72" oc.

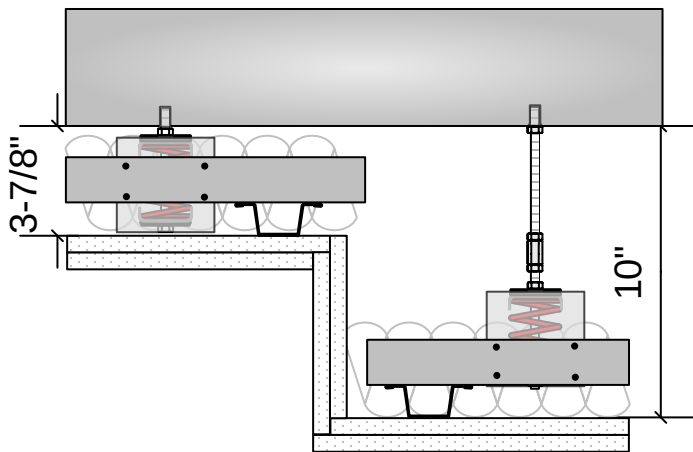

Concrete
Apartment
Retail
Conference Rooms

Condo
Commercial
Recording Studio
Home Theater
Commercial theater

RSIC-SI-CRC2 LP specifications:

Acoustical design load:	10 lbs to 120 lbs
Total deflection	7/8 inch
Pre-Calibrated	YES
Pre-Assembled	YES
Adjustable	YES
Cavity min	3-7/8"
Cavity Max	Bolt Length
Use on Ceilings	YES
Use on walls	NO
New Construction	YES
Tested, Engineered, Designed, and Calibrated In USA	