

Resilmount A72R

Double Right Angle Sound Isolation Bracket



A72R SPECIFICATIONS

Width: 3 7/16"
Height (including rubber): 4 11/32"
Max spacing between clips: 48" OC
Acoustical Design Load: 110 Lbs.



SPECIFICATIONS

Code	Bracket Height	Weight Capacity (lbs)
A72R	4 11/32"	110



INSTALLATION NOTES


- A72R to be fastened to structure with a minimum #8 screw or masonry sleeve anchors. (See fasteners manufacturer's specifications).
- In ceiling applications, always check load ratings with Resilmount's engineers prior to installation.





FASTENERS

Wood Joists: #8 x 2" Course Heads (A)
Steel Joists: #8, #10 or #12 x 1-5/8" self tapping (B)

A



B

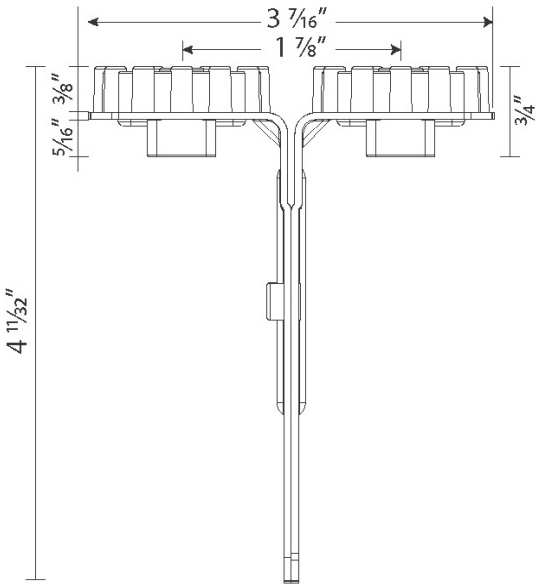

Resilmount A72R

Double Right Angle Sound Isolation Bracket



CEILING INSTALLATION GUIDE

STEP 1

The Resilmount Sound Isolation Clip (A72R) shall be 48 inches by 48 inches on center maximum.

STEP 2

Fasten the Resilmount Sound Isolation Clip (A72R) to the structure with approved fasteners.

STEP 3


Locate the first and last row of the A72R clips within 8 inches from the wall.

STEP 4

Minimum 12 gauge hanger wire ties through the existing 3/16" hole in the vertical leg of the A72R clip.

STEP 5

When using tie wire attached to the A72R clip to hang a drywall grid ceiling, follow the installation instructions provided by the grid manufacturer.

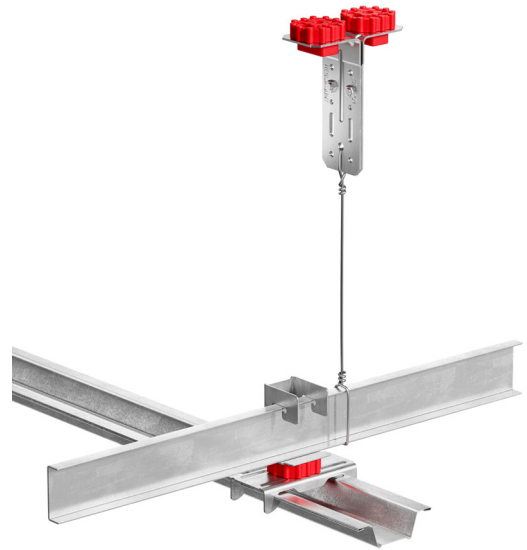

Resilmount A72R

Double Right Angle Sound Isolation Bracket



WALL INSTALLATION GUIDE

STEP 1

The Resilient Sound Isolation Clip (A72R) shall be spaced to support 110lbs maximum.

STEP 2

Locate the A72R clips within the 3-6 inches from the wall.

STEP 3

Fasten the Resilient Sound Isolation Clip (A72R) to the structure's substrate with a minimum of 2 approved fasteners.

STEP 4

Ensure the clip is secure to the framing member.

STEP 5

The A72R shall be 48 inches by 48 inches on the center maximum.

