


# Double Set

## Features

- Unique construction – Made from extra durable, yet pliable rubber for superior support.
- Environmentally safe, recyclable, and passes the CRI Green Label Plus indoor air quality carpet cushion testing program.
- Contributes to LEED® Project Certification (Leadership in Energy and Environmental Design).
- Fresh Dimension® antimicrobial – Inhibits the growth of mold, mildew, and odor-causing bacteria.
- Performance – Resists bottoming out more effectively than competitive products.

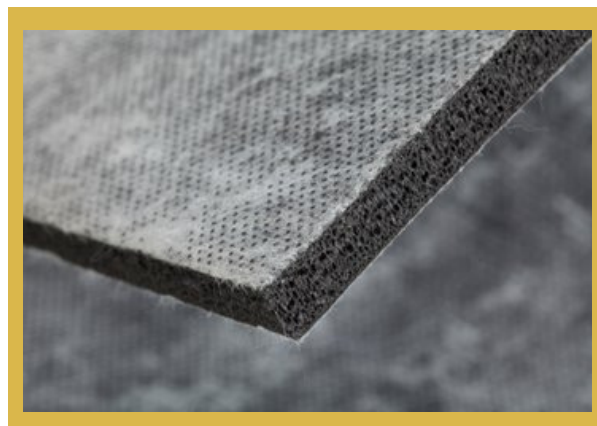

|                               |                                                         | DOUBLESET®<br>68 oz | DOUBLESET®<br>80 oz        | TEST<br>STANDARD                |
|-------------------------------|---------------------------------------------------------|---------------------|----------------------------|---------------------------------|
| SPECIFICATIONS                |                                                         |                     |                            |                                 |
| Application                   | Commercial Use                                          | Commercial Use      | Commercial Use             |                                 |
| Material Type                 | Synthetic Rubber                                        | Synthetic Rubber    | Synthetic Rubber           |                                 |
| Product Codes                 | BV0025                                                  | BV0026              | BV0027                     |                                 |
| Thickness, inches             | 5/32” (+/- 0.015”)                                      | 1/4” (+/- 0.020”)   | 1/4” (+/- 0.020”)          | ASTM D3574                      |
| Weight, oz/yd2                | 62                                                      | 68                  | 80                         | ASTM D3574                      |
| Density, lbs/ft3              | 30                                                      | 23                  | 27                         | ASTM D3574                      |
| Commercial Traffic Class      | Class III<br>(extra heavy)                              | Class II<br>(heavy) | Class III<br>(extra heavy) |                                 |
| Roll Size, yd2                | 15                                                      | 15                  | 15                         |                                 |
| Dimensions                    | 4.5’ x 30’                                              | 4.5’ x 30’          | 4.5’ x 30’                 |                                 |
| PERFORMANCE                   |                                                         |                     |                            |                                 |
| Compression Resistance        |                                                         |                     |                            |                                 |
| 25%                           | 7.0 psi                                                 | 3.0 psi             | 6.0 psi                    | ASTM D3676                      |
| 65%                           | 15.0 psi                                                | 10.0 psi            | 12.0 psi                   | ASTM D3676                      |
| Compression Set, Max. %       | 15                                                      | 15                  | 15                         | ASTM D3574                      |
| Tensile Strength, Min. psi    | >25                                                     | >25                 | >25                        | ASTM D3574                      |
| ACOUSTICAL PROPERTIES         |                                                         |                     |                            |                                 |
| Impact Insulation Class (IIC) | 71                                                      | 75                  | 74                         | ASTM E492-77                    |
| FLAMMABILITY                  |                                                         |                     |                            |                                 |
| Pill Test                     | PassesPassesPasses                                      |                     |                            | DOC-FF-1-70                     |
| Smoke Density Test (NIST)     | PassesPassesPasses                                      |                     |                            | ASTM E662-97                    |
| Radiant Panel Test            | N/A – Cushion must be tested in combination with carpet |                     |                            | ASTM E648                       |
| PROTECTION                    |                                                         |                     |                            |                                 |
| Antimicrobial Treated         | Yes                                                     | Yes                 | Yes                        | EPA-Registered                  |
| Hypoallergenic                | Yes                                                     | Yes                 | Yes                        |                                 |
| Indoor Air Quality            | Certified                                               | Certified           | Certified                  | CRI Green Label<br>Plus Program |