



SUSTAINABLE ACOUSTICAL COMFORT



SUSTAINABLE, ACOUSTICAL, AND COMFORTABLE UNDERLAYMENT NO.2026

DURA-SON MB™

UP TO IIC 74

WE'VE BEEN REVOLUTIONIZING FLOOR ACOUSTICS SINCE 1957

DURA-SON MB

RESIDENTIAL & COMMERCIAL USE

Dura has a clear goal: produce the highest performing underlay and carpet cushion products while contributing to the preservation of our environment for generations to come. Through our unique process of giving a second life to used rubber, we've achieved our lofty goal by creating products that absorb sound like no other and lasts for years.

Our Dura-Son MB underlayment features a moisture barrier that provides additional protection against water damage and extends the life of your flooring. We offer comfort and luxury that only a soundproof space can offer. Ideal for floating engineered hardwood and laminate flooring systems in areas where moisture accumulates, such as basements, bathrooms, kitchens, and laundry rooms. Dura-Son MB is perfectly adapted to the standards of the residential and commercial sector and is guaranteed for life.

HIGH-PERFORMANCE UNDERLAYMENT



ENGINEERED
HARDWOOD
AND LAMINATE



CERAMIC



VINYL



CARPET



✓ **THE BEST ACOUSTICAL UNDERLAYMENT IN ITS CATEGORY**

✓ **MOISTURE BARRIER FOR ADDITIONAL PROTECTION**

✓ **LASTS A LIFETIME**

✓ **MADE FROM RECYCLED RUBBER**

✓ **RETAINS ITS SOUNDPROOFING QUALITIES**

IMPERIAL MATERIAL SPECIFICATIONS


Thickness	0.137 in
"R" Value	0.32
Mass	40 oz / sq. yd
Density	22 lb / cu. ft
Tensile	24 lb / in
Content	Minimum 95% recycled rubber
Roll Size	24 sq. yd
Roll Weight	60 lb
Roll Width	54 in.
Roll Length	48 ft.
Roll Diameter	10 in.
Coverage	216 sq. ft
Acoustic Value	IIC 74 / ASTM E90 and E492 - Impact Sound Transmission
Moisture Protection	3 mil Polyethylene
Water Vapor Transmission Rate	0.0009g / hr. / sq.ft. Or 0.010g / hr. / sq.m. / ASTM E96
Green Quality	CRI Green Label Plus approved
Anti-Microbial	Naturally resists mold, mildew and fungus growth
Radiant Heated Floors	Compatible
LEED	Contributes up to 6 credits
Flammability	PASS Pill Test / ASTM D2859
Warranty	Lifetime*

METRIC MATERIAL SPECIFICATIONS

Thickness	3.5 mm
“R” Value	0.32
Mass	1.36 kg / sq. m
Density	352.41 kg / cu. m
Tensile	214 N / 5 cm
Content	Minimum 95% recycled rubber
Roll Size	20.01 sq. m
Roll Weight	27.22 kg
Roll Width	1.37 m
Roll Length	14.63 m
Roll Diameter	25.4 cm
Coverage	20.01 sq. m
Acoustic Value	IIC 74 / ASTM E90 and E492 - Impact Sound Transmission
Moisture Protection	3 mil Polyethylene
Water Vapor Transmission Rate	0.0009g / hr. / sq.ft. Or 0.010g / hr. / sq.m. / ASTM E96
Green Quality	CRI Green Label Plus approved
Anti-Microbial	Naturally resists mold, mildew and fungus growth
Radiant Heated Floors	Compatible
LEED	Contributes up to 6 credits
Flammability	PASS Pill Test / ASTM D2859
Warranty	Lifetime*

WHAT MAKES DURA-SON MB THE NEW STANDARD

**GREATLY REDUCES
IMPACT SOUND**



**PROVIDES UNDERFOOT
COMFORT & DOES NOT
COLLAPSE OVER TIME**



**GUARANTEED TO WORK OVER
RADIANT HEATED FLOORS**



**RESISTS MOLD, MILDEW,
AND FUNGUS GROWTH**



EASY TO INSTALL



**CONTRIBUTES TO
LEED CREDITS**



**GREEN LABEL
PLUS+ CERTIFIED**



**MADE FROM
RECYCLED RUBBER**




**EQUIPPED WITH
AN EXCELLENT
MOISTURE BARRIER**



ACOUSTICAL TESTING

PERFORMED BY:
INTERTEK

ASTM E90 + ASTM E492

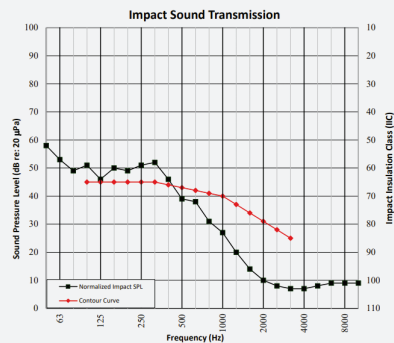

Laminate
Dura-Son MB 3.5 mm (1/8")
Plywood (2 x 3/8")
Super Dura 10 mm (25/64")
6" Concrete Slab
Suspended Ceiling

IIC*74

Vinyl
Dura-Son MB 3.5 mm (1/8")
Cement board (2 x 1/2")
Duracoustic 8 mm (5/16")

IIC*72

14 mm Engineered Hardwood
Dura-Son MB 3.5 mm (1/8")

IIC*69

Reinforced Concrete Slab
200 mm (8") Bare Slab


IIC*36

Approved and tested by experts

Dura-Son MB 3.5 mm was tested under a laminate floor over a 6" concrete slab. Dura-Son MB 3.5 mm (1/8") obtained an IIC 74. IIC is a measure of impact sound transmission from one floor to another. The standard IIC recommendation is 55 with a hardwood floor. The higher the IIC rating, the better quality of sound absorption.

Dura-Son MB Specifications

The sound rated floor material shall be an open cellular rubber reinforced with solid rubber particles bonded to fiberglass backing, 3.5 mm (1/8") thick, approximately 40 oz/yd² in weight, and 22 lb/ft³ in density. The product improves moisture protection with a 3 mil. barrier and a water vapor transmission rate of .0009 g/hour/square foot or 0.010 g/hour/m². (ASTM E96). The product shall have an IIC rating of 74 (tested as per ASTM E90 + ASTM E492) based on the construction detailed in this brochure. The acoustical material shall be DURA-SON MB 3.5 mm (1/8") manufactured by: Dura Undercushions Ltd.

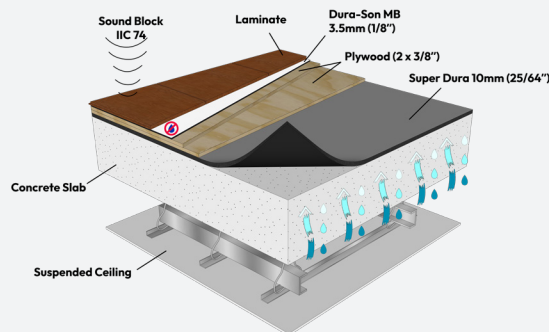

We invite you to contact us
for any inquiries via email:
info@duraundercushions.com
or via phone:
1-800-295-4126

QUICK AND EASY TO INSTALL

STEPS

1

Make sure the subfloor is clean, dry and flat. Level any imperfections.

2

DURA-SON MB is to be installed **ONLY** under floating floors, loose laid and not glued to the subfloor. Always install black side down.

3

DURA-SON MB may be installed parallel or perpendicular to flooring.

4

DURA-SON MB seams must be placed tightly together and joined with a 2" vapor barrier tape.

5

Always follow the flooring manufacturer's specifications.



INSTALLATION VIDEO



Dura-Son MB is not suitable for:

- Parquet wood tile floor
- Solid hardwood floor
- Ceramic, vinyl tile or vinyl sheet

Contact us directly if you plan an installation under ceramic, parquet wood tile floor, vinyl tile or vinyl sheet.

WARRANTY

Dura underlayments are warranted to retain their essential firmness, resilience, and porosity through the useful life of the floor covering under which they are installed. This warranty applies to all types of indoor installations. In the event of a confirmed product failure due to a manufacturing defect, we will replace the defective section of the underlayment with a new equivalent product, free of charge.

This warranty applies only if the product is used in accordance with our instructions and for its intended purpose. It does not cover defects or failures due to improper use or misuse.



DISCOVER MORE

DURABLE ACOUSTICAL COMFORT



For Engineered Hardwood and Laminated Flooring

YOU NEED:

DURA-SON
DURA-SON MB

MULTI-RESILIENT LAYER FLOORING

YOU NEED:

DURACOUSTIC



For Carpet & Carpet Tile

YOU NEED:

DURACUSHION (Carpet)
SUPERDURA (Carpet)
PROTECTOR (Carpet)
DURALUX (Carpet)

DURAPAD (Carpet Tile)
DURAQUIET (Carpet Tile)

MULTI-RESILIENT LAYER FLOORING

YOU NEED:

DURACOUSTIC

The durability of our products are the solution to all your acoustical needs. They will outlast and maintain their acoustical and comfort qualities throughout their lifetime.



For Ceramics

YOU NEED:

DURAQUIET

**MULTI-RESILIENT
LAYER FLOORING**

YOU NEED:

DURACOUSTIC



For Vinyl

YOU NEED:

DURAPAD (LVT/LVP)

DURAQUIET (LVT/LVP/Sheet Vinyl)

**MULTI-RESILIENT
LAYER FLOORING**

YOU NEED:

DURACOUSTIC



SUSTAINABLE ACOUSTICAL COMFORT

**8525 CHEMIN DELMEADE, MONTREAL
QC H4T 1M1**

1-800-295-4126

INFO@DURAUNDERCUSHIONS.COM

WWW.DURACUSHION.COM

