


PRIVACY

ACOUSTICAL PIPE WRAP

EASY TO CUT, WRAP & INSTALL WITH LAG TAPE

CLASS A FLAMMABILITY RATING PER ASTM E-84

STANDARD ROLL IS 48" WIDE X 30' LONG

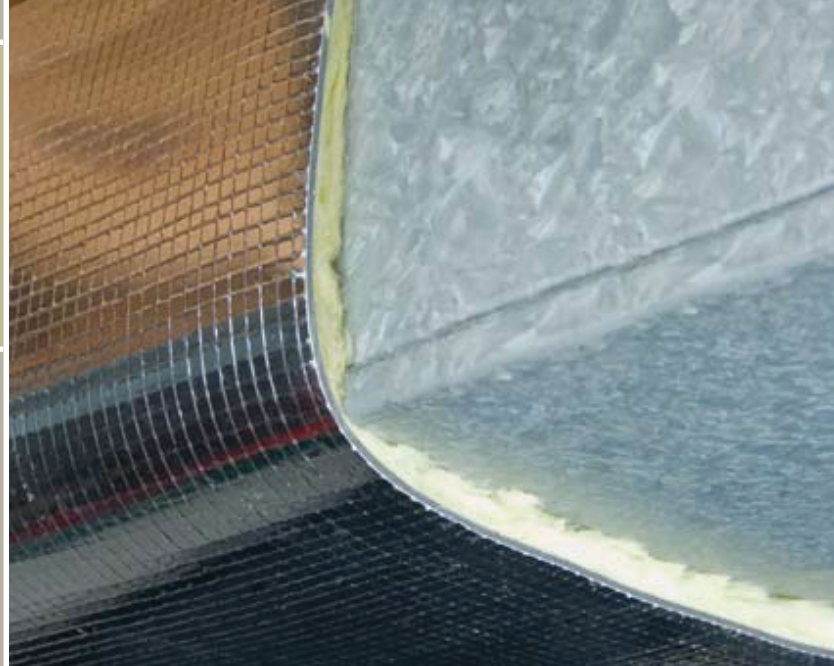

Sound Transmission Loss:

PRODUCT	OCTAVE BAND (HZ)						STC
	125	250	500	1000	2000	4000	
PIPE WRAP	15	10	21	26	33	38	26
PIPE WRAP 1"	18	18	23	30	39	46	29
PIPE WRAP 2"	19	20	23	33	44	53	30

per ASTM E-90 & E 413

Other products to combat HVAC noise problems.



Privacy Duct Silencer



Privacy Replacement Duct

PRIVACY ACOUSTICAL PIPE WRAP

A composite material featuring a flexible one pound per square foot reinforced foil-faced loaded vinyl noise barrier bonded to a 1" thick quilted fiberglass sound absorber. Used to wrap noisy pipes, ducts, valves and fan housings.


Application:

Typically used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it. The quilted fiberglass decoupler improves the performance of the noise barrier as well as to provide sound absorption and thermal insulation around the pipe or ductwork.

The reinforced foil facing on the barrier readily accepts a matching lag tape for easy installation and also serves as a protective jacket for indoor or outdoor applications.

Product Data:

Nominal Thickness: 1"
 Standard Size: 48" wide x 30' long
 Weight: 1.22 lb psf.
 Temperature Range: -20° to +350° F
 "R" Factor: 4.0
 Flammability: Class A (or 1) Per ASTM E-84
 Smoke Density Index: 19.5
 Flame Spread Index: 12.5



WEST COAST
SOUND SOLUTIONS

98 12TH STREET
 SAN FRANCISCO, CA 94103
 PHONE: (888) 927-7496
 FAX: (415) 864-4447

WWW.WESTCOASTSOUNDSOLUTIONS.COM

www.westcoastsoundsolutions.com