

# Resilmount A237

## Metal Furring Channel Clip

### APPLICATIONS

Resilmount® A237 is a direct mounting bracket for Studco furring channels, for reducing airborne and structure-borne vibration in wall and ceiling applications. The A237 represents an enhancement over the conventional resilient channel. Its installation does not compromise the acoustic application, unlike typical installation mistakes associated with standard resilient channel.

### FEATURES


- Simple design makes it adaptable to several applications.
- Consistent and reliable quality - manufactured under ISO 9001.
- Decouples gypsum board from framing or structure to stop flow of STC and IIC vibrations.
- A237 clips can be used to suit 7/8" and 1 1/2" furring channels.
- A237 are provided with a 1/4" hole for a variety of fasteners.
- Resilmount is the most cost effective way to isolate airborne noise.
- UL approved in 38 wall and ceiling assemblies.

### INSTALLATION NOTES

- A237 to be fastened to structure with a minimum #8 screw or masonry sleeve anchors. (see fasteners manufacturers specifications).
- Max design load: 55 lbs. Maximum dead load.
- Maximum spacing of clips on furring channel is 48".
- Spacing between furring channels should not exceed 24".



**A237**

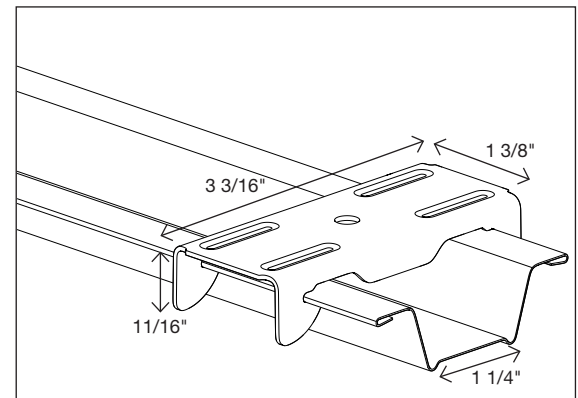

**A237 DIMENSIONS**

Resilmount A237

Metal Furring Channel Clip

SPECIFICATIONS

| Code | Clip Height | Metal Thickness | Clip width x length |
|------|-------------|-----------------|---------------------|
| A237 | 11/16"      | 0.047"          | 1 3/8" x 3 3/16"    |

\*Height of rubber on top of clip

WARRANTY

This product is covered by a year guarantee. Conditions and limitations of guarantees and warranties are set out in Studco Project Guarantee certificate.

FURTHER ASSISTANCE

Contact the technical engineering team at Studco Technical Services for assistance with specifications, product selection, acoustic engineering and structural engineering enquiries.  
Tel: 800 675 8023 or email [sales@resilmount.com](mailto:sales@resilmount.com)

RELATED PRODUCTS

- A237R Furring Channel Sound Isolation Clip
- A96R Purlin to Furring Channel Sound Isolation Bracket
- A48R Right Angle Sound Isolation Bracket
- A24R Chase Wall Sound Isolation Joiner Bracket

ACCREDITATION/CERTIFICATION

✓

ISO9001:2015  
CERTIFIED COMPANY

Quality  
Management  
System

✓

ISO14001:2015  
CERTIFIED COMPANY

Environmental  
Management  
System

CLASSIFIED

UL

C

US

Intertek

R

RiverbankAcoustical  
LABORATORIES<sup>®</sup>

NGC<sup>®</sup>

TESTING SERVICES

ACOUSTICAL • FIRE • STRUCTURAL • ANALYTICAL<sup>™</sup>

WEAL

A237 WOOD INSTALLATION

A237 CONCRETE INSTALLATION

A237 STEEL INSTALLATION

Studco A237 Datasheet\_US\_DS\_AW\_0525

2/2

For Sales Enquiries, please contact the Resilmount team on 800 675 8023

Studco Building Systems US LLC | 1700 Boulter Industrial Parkway, Webster NY 14580 | [www.resilmount.com](http://www.resilmount.com)